# Juo

Open-Ear TWS Earbuds

JT3

User Manual
Kullanma Kılavuzu

www.juo.com.tr



## Ürün Açıklaması

JUO JT3 Open-Ear True Wireless Stereo (TWS) Kulaklık; yenilikçi açık kulak tasarımı ve gelişmiş kablosuz ses teknolojilerini bir araya getiren premium bir ses çözümüdür. Kulak kanalını tamamen kapatmayan açık sürücü mimarisi ve kulak arkası kancalı ergonomik yapısı sayesinde, gün boyu benzersiz bir konfor sunarken çevrenizdeki seslerden kopmadan güvenli bir dinleme deneyimi yaşatır. Özellikle açık hava sporlarında, dinamik günlük aktivitelerde ve yoğun iş temposunda kulak sağlığınızı korumak için idealdir. Gelişmiş dinamik sürücüleri ve entegre Çevresel Gürültü Engelleme (ENC) özellikli çift mikrofon sistemi, telefon görüşmelerinizde sesinizin net ve pürüzsüz iletilmesini sağlar. Ultra düşük gecikmeli Oyun Modu (Gaming Mode) ise ses ve görüntü arasındaki senkronizasyonu mükemmelleştirerek multimedya deneyiminizi zirveye taşır. Akıllı şarj kutusu, hızlı şarj desteği ile kulaklıklarınızı kısa sürede kullanıma hazır hale getirirken güvenli bir koruma alanı sağlar.

## Ana Özellikler

Yenilikçi Açık Kulak (Open-Ear) Tasarımı: Kulak kanalına girmeyen yapısı sayesinde kulak içi basınç oluşturmaz, uzun süreli kullanımlarda üstün hijyen ve konfor sağlar.

Gelişmiş Çevresel Gürültü Engelleme (ENC): Entegre çift mikrofon algoritması, aramalar sırasında arka plandaki dış gürültüleri filtreleyerek net bir iletişim sunar.

Düşük Gecikmeli Oyun Modu (Gaming Mode): Mobil oyunlarda ve video izleme süreçlerinde ses gecikmesini en aza indirerek anlık tepki avantajı sağlar.

IPX5 Suya ve Tere Dayanıklılık: Yoğun antrenmanlarda, zorlu spor aktivitelerinde ve yağmurlu hava koşullarında güvenle kullanım imkanı tanır.

Hızlı Şarj ve Uzun Pil Ömrü: Sadece 10 dakikalık hızlı şarj ile 2 saate kadar oynatma süresi sunarken, şarj kutusuyla birlikte toplamda 30 saate varan kullanım süresi sağlar.



## Teknik Özellikler

| | |
|---|---|
| Güç Girişi | 5 V ⎓ 1 A |
| Nominal Çıkış Gücü | 5 mW |
| Şarj Süresi | < 2 Saat (10 dakika şarj = 2 saat oynatma) |
| Bluetooth Versiyonu | 6.0 |
| Çalma / Oynatma Süresi | 9 Saate Kadar (Şarj kutusu ile toplam 30 Saat) |
| Frekans Tepkisi | 20 Hz - 20 kHz |
| Mikrofon Sistemi | 2 ( 2x ENC Mikrofon ) |
| Su Geçirmezlik Seviyesi | IPX5 |
| Bluetooth Çekim Mesafesi | 10 Metre / 33 Feet |

Manufacturer / Importer
MAXİTEKNO
Bilişim Elektronik Ticaret. Ltd. Şti.

Murat Çeşme Mh. E-5 Londra Asfaltı
No:122/A Tekno Center 2. Kat
Büyükçekmece/İSTANBUL
0212 428 87 78
info@maxitekno.com
www.maxitekno.com
www.juo.com.tr



## Paket İçeriği

Kutunuzu açtığınızda aşağıdaki bileşenlerin eksiksiz olarak yer aldığından emin olun:

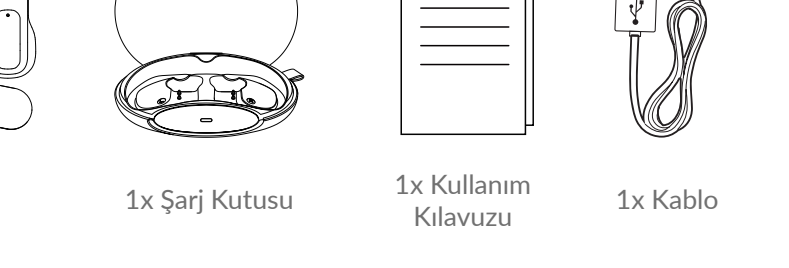

1x Kulaklıklar (Sağ & Sol) — 1x Şarj Kutusu — 1x Kullanım Kılavuzu — 1x Kablo

## Ürün Şeması

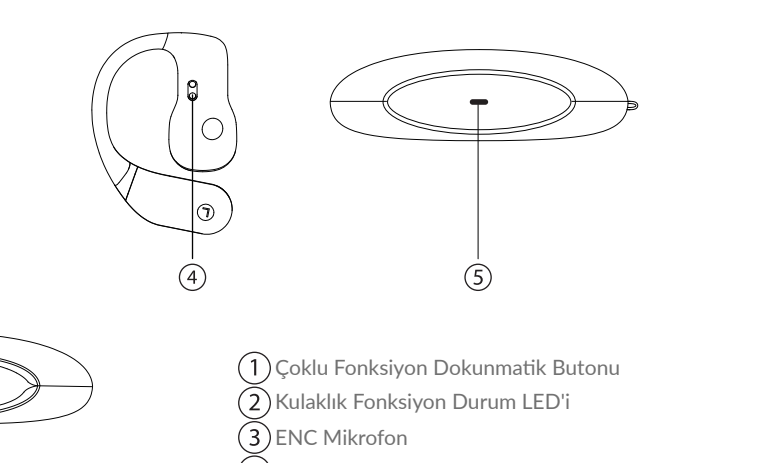

1. Çoklu Fonksiyon Dokunmatik Butonu
2. Kulaklık Fonksiyon Durum LED'i
3. ENC Mikrofon
4. Şarj Pinleri
5. Şarj Kutusu Pil Gösterge LED'i
6. Type-C USB Şarj Portu



## Doğru Kullanım Adımları

1. Kulaklığın esnek kanca yapısını hafifçe genişleterek kulağınızın arkasına tam oturacak şekilde yerleştirin. Kulaklık gövdesinin kulak kanalınızın dış girişine hizalandığından emin olun.

2. Kulaklığı hafifçe döndürerek kendiniz için en konforlu ve sesi en iyi duyabildiğiniz sabit pozisyonu bulun.



## Şarj Etme ve Güç Yönetimi

- İlk kullanımdan önce hem kulaklıkları hem de şarj kutusunu tamamen şarj edin.
- Olası hasarları önlemek amacıyla, yalnızca paket içeriğinden çıkan orijinal Type-C şarj kablosunu kullanın.
- Kulaklıkları şarj kutusuna yerleştirmeden veya kabloyu takmadan önce şarj portunun tamamen kuru olduğundan emin olun.





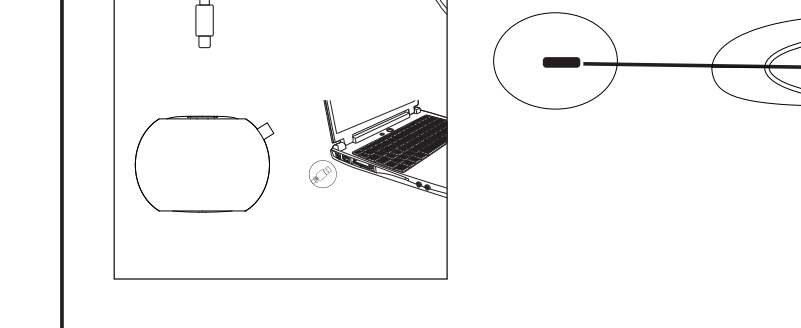


- Şarj Kutusundaki LED, şarj durumunu ve pil seviyesini gösterir.

## Açılma ve Kapanma

- Otomatik Açılma: Kulaklıklar şarj kutusundan çıkarıldığında otomatik olarak açılır.
- Otomatik Kapanma: Kulaklıklar şarj kutusuna geri yerleştirildiğinde otomatik olarak kapanır ve şarj moduna geçer.
- **Önemli Not:** Şarj kutusunun pili tamamen tükendiğinde, kulaklıklar kutuya konulsa bile otomatik olarak kapanmayabilir veya kutudan çıkarıldığında açılmayabilir. Lütfen şarj kutusunu zamanında şarj etmeye özen gösterin.






## Eşleştirme ve Bağlantı Adımları

### 1. Kablosuz Stereo (TWS) Bağlantısı

Sol ve sağ kulaklığı aynı anda şarj kutusundan çıkarın. Kulaklıklar otomatik olarak birbirleriyle eşleşecek ve sağ kulaklık sol kulaklığa saniyeler içinde bağlanacaktır.

### 2. Bluetooth Cihaz Bağlantısı

Kulaklıklar açıldığında otomatik olarak "Eşleştirme Modu"na girer. Bu sırada kulaklıkların LED göstergesi mavi ve beyaz renklerde yanıp sönmeye başlar. Akıllı cihazınızın Bluetooth menüsünü açın, aktif cihazları taratın ve listeden "JT3" ismini seçerek bağlantıyı onaylayın. Bağlantı başarıyla kurulduğunda LED ışıklar sönecek ve kulaklıktan "Connected" sesli uyarısı duyulacaktır. Bağlantı kesildiğinde ise "Disconnected" uyarısı verilir.

### 3. Tekli (Mono) Kulaklık Kullanımı

Dilerseniz şarj kutusundan sadece Sol (L) veya sadece Sağ (R) kulaklığı çıkararak tekli modda kullanabilirsiniz. Akıllı cihazınızdan yine "JT3" ismini seçerek bağlantı sağlayabilirsiniz. Tekli kullanım esnasında diğer kulaklığı da kutudan çıkardığınızda, sistem otomatik olarak kesintisiz bir şekilde çiftli (Stereo) moda geçiş yapacaktır.

| | | |
|---|---|---|
| Eşleşme Modu | -○- | Sol veya sağ kulaklık üzerindeki mavi ve beyaz LED gösterge ışığı yanıp söner. |
| Bağlantı Başarılı | ● | Sol veya sağ kulaklık üzerindeki mavi ve beyaz LED gösterge ışığı kapanır. |



## Dokunmatik Kontroller

Kulaklıkların gövdesinde yer alan dokunmatik buton yüzeyini kullanarak tüm multimedya, çağrı fonksiyonlarını ve ses modlarını aşağıdaki tablodaki gibi kolayca yönetebilirsiniz:




| | L | R |
|---|---|---|
| Oynat / Duraklat | x 2 | x 2 |
| Sonraki Şarkı | —— | x 3 |
| Önceki Şarkı | x 3 | —— |
| Ses Seviyesi Ayarı | x 1 Sesi Azaltır | x 1 Artırır |
| Aramayı Cevapla / Sonlandır | x 2 | x 2 |
| Gelen Aramayı Reddet | x 2″ | x 2″ |
| Oyun Modu - Düşük Gecikmeli | x 4 | x 4 |
| Sesli Asistan (Siri / Google | x 2″ | x 2″ |



## Fabrika Ayarlarına Sıfırlama

Kulaklıklar arasında eşleşme sorunu yaşanması veya tek taraftan ses gelmemesi durumunda aşağıdaki adımlarla cihazı sıfırlayabilirsiniz:

1. Kulaklıkları şarj kutusundan çıkarın. Hem sol hem sağ kulaklığın çoklu fonksiyon dokunmatik butonuna aynı anda ardışık olarak 5 kez basın (bu işlem tekli kulaklık modunda veya arama durumu aktifken de işleme alınabilir).

2. Kulaklıkların LED göstergeleri 3 kez beyaz renkte yanıp sönecek ve ardından kulaklıklar kapanacaktır (Power Off uyarısı duyulur).

3. Kulaklıkları şarj kutusuna geri yerleştirerek şarj modunu aktif hale getirin. Ardından kutudan tekrar çıkararak akıllı cihazınıza yeniden bağlayabilirsiniz.




## GARANTİ ŞARTLARI

1. Garanti süresi, malın teslim tarihinden itibaren başlar ve 2 yıldır. (Bu süre 2 yıldan az olamaz.)
2. Malın bütün parçaları dahil olmak üzere tamamı garanti kapsamındadır.
3. Malın ayıplı olduğunun anlaşılması durumunda tüketici, 6502 sayılı Tüketicinin Korunması Hakkında Kanunun 11. maddesinde yer alan;
A-Sözleşmeden dönme,
B-Satış bedelinden indirim isteme,
C-Ücretsiz onarılmasını isteme,
D-Satılan ayıpsız bir misli ile değiştirilmesini isteme
Haklarından birini kullanabilir.
4. Tüketicinin bu haklardan ücretsiz onarım hakkını seçmesi durumunda satıcı: işçilik masrafı, değiştirilen parça bedeli ya da başka herhangi bir ad altında hiçbir ücret talep etmeksizin malın onarımını yapmak ve yaptırmakla yükümlüdür. Tüketici ücretsiz onarım hakkını üretici veya ithalatçıya karşı da kullanabilir. Satıcı, üretici ve ithalatçı tüketicinin bu hakkını kullanmasından müteselsilen sorumludur.
5. Tüketicinin, ücretsiz onarım hakkını kullanması halinde malın;
A-Garanti süresi içerisinde tekrar arızalanması,
B-Tamiri için gereken azami sürenin aşılması,
C-Tamirinin mümkün olmadığının, yetkili servis istasyonu, satıcı, üretici veya ithalatçı tarafından bir raporla belirlenmesi durumlarında,
Tüketici malın bedel iadesini, ayıp oranında bedel indirimi veya imkan varsa malın ayıpsız bir mal ile değiştirilmesini satıcıdan talep edebilir. Satıcı, tüketicinin talebini reddedemez. Bu talebin yerine misli ile getirilmemesi durumunda satıcı, üretici ve ithalatçı müteselsilen sorumludur.
6. Malın tamir süresi 20 iş gününü geçemez. Bu süre, garanti süresi içerisinde mala ilişkin arızanın yetkili servis istasyonuna veya satıcıya bildirimi tarihinde, garanti süresi dışında ise malın yetkili servis istasyonuna teslim tarihinden itibaren başlar. Malın arızasının 10 iş günü içerisinde giderilememesi halinde, üretici veya ithalatçı malın tamiri tamamlanıncaya kadar, benzer özelliklere sahip başka bir malı tüketicinin kullanımına tahsis etmek zorundadır. Malın garanti süresi içerisinde arızalanması durumunda, tamirde geçen süre garanti süresine eklenir.
7. Malın kullanma kılavuzunda yer alan hususlara aykırı kullanılmasından kaynaklanan arızalar garanti kapsamı dışındadır.
8. Tüketici, garantiden doğan haklarının kullanılması ile ilgili çıkabilecek uyuşmazlıklarda yerleşim yerinin bulunduğu veya tüketici işleminin yapıldığı yerdeki Tüketici Hakem Heyetine veya Tüketici Mahkemesine başvurabilir.
9. Satıcı tarafından bu Garanti Belgesinin verilmemesi durumunda, tüketici Gümrük ve Ticaret Bakanlığı Tüketicinin Korunması ve Piyasa Gözetimi Genel Müdürlüğüne başvurabilir.

## GARANTİ / WARRANTY

**ÜRETİCİ VEYA İTHALATÇI FİRMANIN**

**Ünvanı:** Maxitekno Elektronik Ticaret Limited Şirketi.
**Adresi:** Murat Çeşme Mh. E-5 Londra Asfaltı No:122/A Tekno Center 2. Kat Büyükçekmece/İstanbul
**Telefon:** 0212 428 87 78
**E-Posta:** info@maxitekno.com
**Yetkilinin İmzası:**

MAXİTEKNO BİLİŞİM ELEKTRONİK TİCARET LTD. ŞTİ.
Murat Çeşme Mah. E-5 Londra Asfaltı Cad. No: 122/A
Büyükçekmece - İSTANBUL Tel. (0.212) 428 87 78
Tic. Sic. No: 184578-5 - Mersis No: 0613145569600001
BÜYÜKÇEKMECE V.D. 613 145 5696

**SATICI FİRMANIN**

Ünvanı:
Adresi:
Telefonu:
Faks:
E-Posta:
Fatura Tarihi ve Sayısı:
Fatura Tarihi ve Yeri:
Yetkilinin İmzası:
Firmanın Kaşesi:

**ÜRÜNÜN**

**Cinsi:** Juo Açık Kulaklı TWS Kulaklık
**Markası:** Juo
**Modeli:** JT3
**Garanti Süresi:** 2 Yıl
**Azami Tamir Süresi:** 20 iş günü

Made in China

EAC CE RoHS



## Product Description

The JUO JT3 Open-Ear True Wireless Stereo (TWS) Earbuds are a premium audio solution combining an innovative open-ear design with advanced wireless audio technology. Thanks to its open-driver architecture that does not block the ear canal and its ergonomic ear-hook design, it provides unparalleled all-day comfort while delivering a safe listening experience by keeping you connected to your surroundings. It is especially ideal for protecting your hearing health during outdoor sports, dynamic daily activities, and busy work environments. Its advanced dynamic drivers and integrated dual-microphone system featuring Environmental Noise Cancellation (ENC) ensure that your voice is transmitted clearly and smoothly during phone calls. The ultra-low latency Gaming Mode perfects audio and video synchronization, elevating your multimedia experience to the highest level. The smart charging case with fast-charging support readies your earbuds for use in a short time while providing a secure protective enclosure.

## Main Features

Innovative Open-Ear Design: Its non-intrusive structure rests outside the ear canal, preventing in-ear pressure and ensuring superior hygiene and comfort during extended use.

Advanced Environmental Noise Cancellation (ENC): The integrated dual-microphone algorithm filters out background ambient noise during calls, delivering crystal-clear communication.

Low-Latency Gaming Mode: Minimizes audio lag during mobile gaming and video playback, providing a real-time response advantage.

IPX5 Water and Sweat Resistance: Ensures safe and reliable use during intense workouts, rigorous sports activities, and rainy weather conditions.

Fast Charging & Long Battery Life: Provides up to 2 hours of playtime with just a 10-minute fast charge, and delivers a total of up to 30 hours of battery life when used with the charging case.



## Technical Specifications

| | |
|---|---|
| Input | 5 V ⎓ 1 A |
| Rated Output Power | 5 mW |
| Charging Time | < 2 Hour (10 minute charge = 2 hours playtime) |
| Bluetooth Version | 6.0 |
| Playtime | Up to 9 Hours (Total 30 hours with the charging case) |
| Frequency Response | 20 Hz - 20 kHz |
| Microphone System | 2 ( 2x ENC Microphone ) |
| Waterproof Level | IPX5 |
| Bluetooth Range | 10 Meter / 33 Feet |

Manufacturer / Importer
MAXİTEKNO
Bilişim Elektronik Ticaret. Ltd. Şti.

Murat Çeşme Mh. E-5 Londra Asfaltı
No:122/A Tekno Center 2. Kat
Büyükçekmece/İSTANBUL
0212 428 87 78
info@maxitekno.com
www.maxitekno.com
www.juo.com.tr



## Package Contents

When opening the box, please ensure that the following components are included and complete:

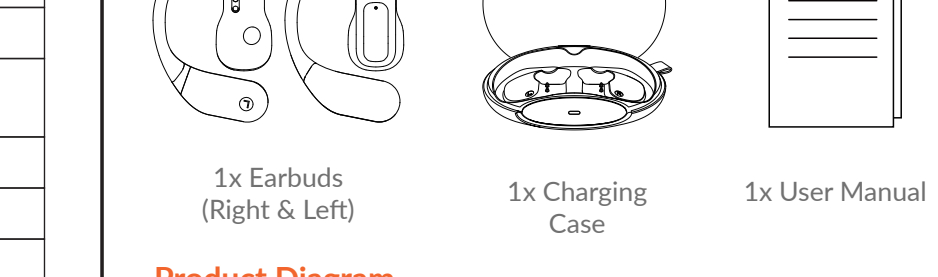

1x Earbuds (Right & Left) — 1x Charging Case — 1x User Manual — 1x Cable

## Product Diagram

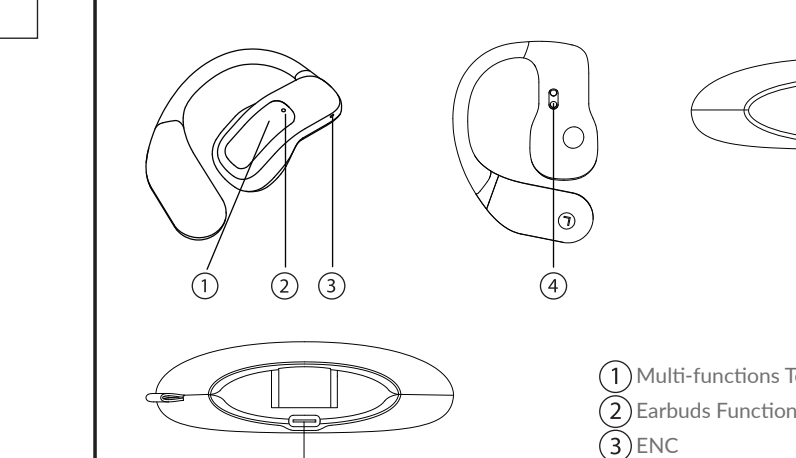

1. Multi-functions Touch Button
2. Earbuds Functions Indicators
3. ENC
4. Charging Pins
5. Charging Case Charging Indicators
6. USB Charging Port (Type-C)



## Proper Wearing Steps:

1. Gently widen the flexible ear-hook structure and place it so that it fits securely behind your ear. Ensure that the earbud body is aligned with the outer entrance of your ear canal.

2. Slightly rotate the earbud to find the most comfortable and stable position that provides the best sound clarity.



## Charging and Power Management

- Fully charge both the earbuds and the charging case before using them for the first time.
- To prevent any potential damage, use only the original Type-C charging cable included in the package.
- Ensure that the charging port is completely dry before placing the earbuds into the charging case or plugging in the cable.





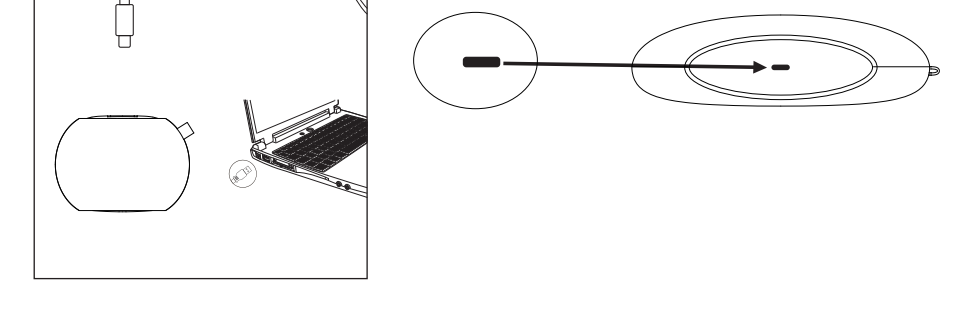


- The LED on the charging case indicates the charging status and battery level.

## Power ON / OFF

- Automatic Power On: The earbuds automatically power on when removed from the charging case.
- Automatic Power Off: The earbuds automatically power off and enter charging mode when placed back into the charging case.
- **Important Note: When the battery of the charging case is completely depleted, the earbuds may not automatically power off when placed inside the case, or power on when taken out. Please ensure the charging case is charged in a timely**






## Pairing and Connection Steps

### 1. True Wireless Stereo (TWS) Connection

Remove the left and right earbuds from the charging case simultaneously. The earbuds will automatically pair with each other, and the right earbud will connect to the left earbud within seconds.

### 2. Bluetooth Device Connection

The earbuds automatically enter "Pairing Mode" when powered on. During this time, the earbud LED indicators will begin flashing blue and white. Open the Bluetooth menu on your smart device, scan for available devices, and select "JT3" from the list to confirm the connection. Once the connection is successfully established, the LED lights will turn off, and a "Connected" voice prompt will be heard from the earbuds. When disconnected, a "Disconnected" prompt will be

### 3. Single (Mono) Earbud Usage

If desired, you can use either the Left (L) or Right (R) earbud individually in mono mode by removing it from the charging case. You can establish the connection by selecting "JT3" from your smart device. When you remove the other earbud from the case during single-earbud use, the system will automatically and seamlessly switch to dual (Stereo) mode.



| | | |
|---|---|---|
| Pairing Mode | -○- | Blue and white LED of left or right earbud flashes. |
| Connected Successfully | ● | Blue and white LED of left or right earbud goes out. |



## Touch Controls

Using the touch control surface on the earbud body, you can easily manage all multimedia, call functions, and audio modes as shown in the table below:




| | L | R |
|---|---|---|
| Play / Pause | x 2 | x 2 |
| Next Song | —— | x 3 |
| Previous Song | x 3 | —— |
| Volume Up / Down | x 1 Down | x 1 Up |
| Answer End a Call | x 2 | x 2 |
| Reject Call | x 2″ | x 2″ |
| Gaming Mode-Low Latency | x 4 | x 4 |
| Voice Assistant (Siri, Google etc.) | x 2″ | x 2″ |



## Reset to Factory Settings

If you experience pairing issues between the earbuds or if sound only comes from one side, you can reset the device by following these steps:

1. Remove the earbuds from the charging case. Press the multi-function touch button on both the left and right earbuds simultaneously 5 times consecutively (this action can also be performed in single earbud mode or during an active call).

2. The earbud LED indicators will flash white 3 times, and then the earbuds will power off (a "Power Off" voice prompt will be heard).

3. Place the earbuds back into the charging case to activate charging mode. Then, remove them from the case again to reconnect to your smart device.




## WARRANTY TERMS

1. The warranty period starts from the date of delivery of the product and is 2 years.
(This period cannot be less than 2 years.)
2. The entire product, including all its parts, is under warranty coverage. 3. In the event that the product is found to be defective, the consumer may exercise one of the following rights provided in Article 11 of the Law on the Protection of the Consumer No. 6502:
A- Rescind the contract (Return the product),
B- Request a discount on the sales price,
C- Request free repair,
D- Request replacement with a non-defective equivalent.
4. If the consumer chooses the right to free repair; the seller is obliged to repair the product without claiming any labor cost, replacement part cost, or any other fee under any name. The consumer can also exercise this right against the manufacturer or importer. The seller, manufacturer, and importer are jointly and severally liable for the consumer's use of this right.
5. If the consumer exercises the right to free repair and;
The product malfunctions again within the warranty period,
The maximum time required for repair is exceeded,
It is determined by a report from the authorized service station, seller, manufacturer, or importer that repair is not possible;
The consumer may request a refund, a price discount in proportion to the defect, or, if possible, replacement with a non-defective equivalent from the seller. The seller cannot refuse this request. If this request is not fulfilled, the seller, manufacturer, and importer are jointly and severally liable.
6. The repair period for the product cannot exceed 20 working days. This period starts from the date of notification of the malfunction to the authorized service station or the seller within the warranty period, and from the date of delivery of the product to the authorized service station outside the warranty period. If the product malfunction is not rectified within 10 working days, the manufacturer or importer must allocate another product with similar specifications to the consumer's use until the repair is completed. If the product malfunctions within the warranty period, the time spent in repair is added to the warranty period.
7. Defects arising from the use of the product contrary to the instructions stated in the user manual are outside the scope of the warranty.
8. The consumer may apply to the Consumer Arbitration Committee or the Consumer Court in the place of residence or where the consumer transaction occurred for disputes arising from the exercise of rights arising from the warranty.
9. In case this Warranty Certificate is not provided by the seller, the consumer may apply to the General Directorate of Consumer Protection and Market Surveillance of the Ministry of Customs and Trade.

## WARRANTY

**MANUFACTURER OR IMPORTER FIRM**

**Title:** Maxitekno Elektronik Ticaret Limited Şirketi.
**Address:** Murat Çeşme Mh. E-5 Londra Asfaltı No:122/A Tekno Center 2. Kat Büyükçekmece/İstanbul
**Phone:** 0212 428 87 78
**E-Mail:** info@maxitekno.com
**Authorized Signature:**

MAXİTEKNO BİLİŞİM ELEKTRONİK TİCARET LTD. ŞTİ.
Murat Çeşme Mah. E-5 Londra Asfaltı Cad. No: 122/A
Büyükçekmece - İSTANBUL Tel. (0.212) 428 87 78
Tic. Sic. No: 184578-5 - Mersis No: 0613145569600001
BÜYÜKÇEKMECE V.D. 613 145 5696

**SELLER FIRM**

**Title:**
**Address:**
**Phone:**
**Fax:**
**E-Mail:**
**Invoice Date and Number:**
**Invoice Date and Location:**
**Authorized Signature:**
**Company Stamp:**

**PRODUCT**

**Type:** Juo Open-Ear TWS Earbuds
**Brand:** Juo
**Model:** JT3
**Warranty Period:** 2 Years
**Maximum Repair Time:** 20 Working Days

Made in China

EAC CE RoHS